

L BAND DOWN CONVERTER


Model No : LDC-8002

Introduction

The unit receives the input signals in the range of 950 MHz to 1550 MHz or 950 MHz to 2150 MHz and down converts through dual conversion without inversion to 70MHz. Main features related to Gain, gain flatness, phase noise, spurious levels etc., are highlighted in this data sheet. The unit is locally controlled and monitored on front panel and also remotely controlled and monitored through different protocols like TCP/IP, RS422 et., The unit is housed in a 1RU chassis with agile features to cater for reliability and mechanical stability. Unit operates on 230V AC input power and the environmental specs catered for use in indoor controlled operations.

Features

<ul style="list-style-type: none"> Excellent phase noise of Local Oscillators with OCXO internal reference Auto selectable Internal/External reference Very low in-band and out-of-band spurious M&C integration through SNMP, TCP IP, RS422, etc., Integration Protocols Remote Management through Web Interface Console 	<ul style="list-style-type: none"> On-board state-of-the-art microcontroller <ul style="list-style-type: none"> Auto selectable Int./Ext. Reference Summary alarm with form-c for redundancy Memory storage facility for data recall Parameters like gain, frequency, etc are varied and displayed either on front panel or remote frontend
--	---

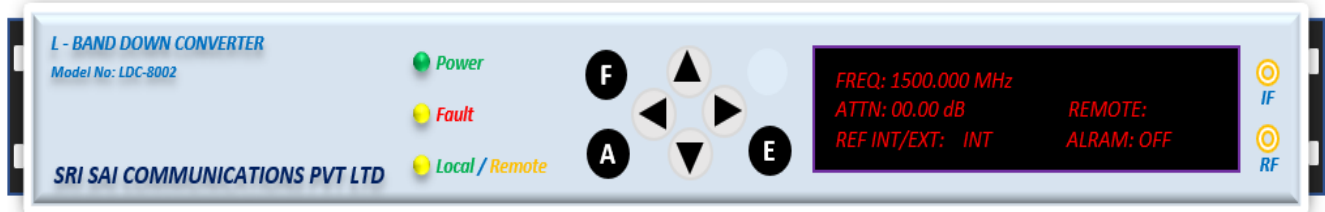

Specification	Values	Specification	Values
Input (RF)		M&C Features	
Input Frequency	950 MHz – 1550 MHz 950 MHz – 2150 MHz	Front Panel	
Impedance	50 Ω	Controls	Frequency, Attenuation, Local / Remote Selections
Return Loss	18 dB Minimum	Monitoring	<ul style="list-style-type: none"> Frequency, Attenuation, Local / Remote, Ext/Int. on LCD Screen LED Status Indicators for Fault/Alarm, Power, Local/Remote
Noise Figure	Better than 12 dB	Remote Control & Monitoring	Through protocols like RS-485/422 or RS-232 or TCP IP / SNMP Ethernet, etc
Typical Input Level	- 45 dBm	Admin Control	Web Interface
Connector	N Type (F)	Connectors	
Output (IF)		Input RF	N Type (F)
Frequency	70 MHz ±18 MHz	Output IF	BNC Type (F)
Impedance	50 Ω	Sample	RF – SMA (F), IF - BNC (F)
Return Loss	> 18 dB	Physical Dimensions	Form Factor 1RU 19” Rack Mountable
Power output @1 dB compression	+10 dBm, Minimum	Environmental	Temp. 0 – 50° C, 0 – 95% relative humidity and 8000 ft MSL
Connector	BNC, (F)	Power Input	Power Voltage 90-230 V AC, Frequency 47 - 63 Hz (Options Available)
Transfer Characteristics		Power Input	
Type	Dual Conversion	Phase Noise	-70 dBc @ 100 Hz -80 dBc @ 1 KHz -88 dBc @ 10 KHz -100 dBc @ 100 KHz
Frequency Sense	No inversion	Intermod Products	-50 dBc @ 0 dBm (2 carrier output)
Attenuation Adjust	0-30 dB in .25 dB Steps		
Conversion gain	40 dB Min		
Spurious	<ul style="list-style-type: none"> Non Carrier -70 dBm Carrier -60 dBc @ 0dBm Output 		
LO Characteristics			
1 st Conversion Oscillator	Synthesizer with step size of 1 KHz		
2 nd Conversion Oscillator	Phase Locked Oscillator		
10 MHz Internal / External Reference	Auto select when external reference is fed		

Sri Sai Communications Private Limited

SatCom & Defense Communication Systems & Products

BLOCK DIAGRAM

